




HTC EVO 4G Speaker Replacement

How to replace the speaker.

Written By: Sage Jurado



Step 1 — Battery

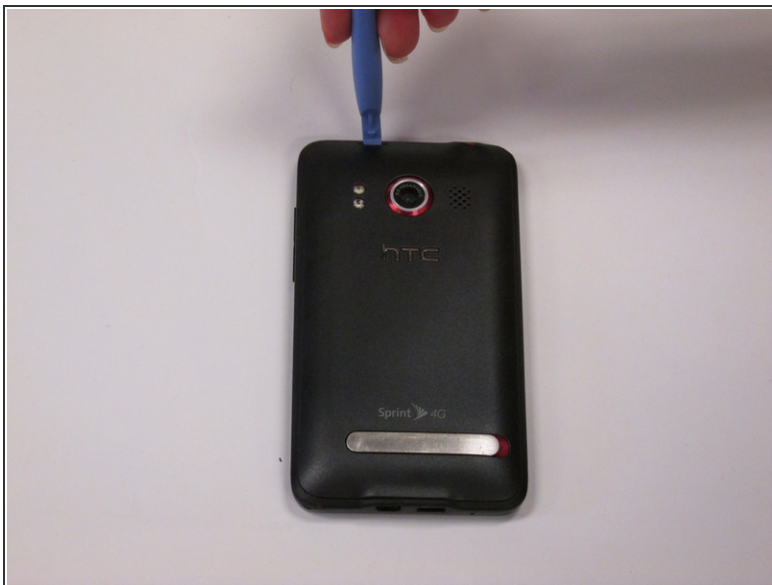

- The first step is to remove the back case of the phone preferably with a plastic opening tool.

Step 2



- The next step is to remove the battery from the phone by carefully lifting it out with your fingers.

Step 3



- Set the battery aside.

Step 4 — Speaker




- you should remove the six T5 screws holding the Inner frame in place. Be careful not to loose the screws

Step 5



- Using the plastic opening tool again, gently pry the inner frame apart from the rest of the phone
- Remove the inner frame from the rest of the phone by lifting it off

Step 6

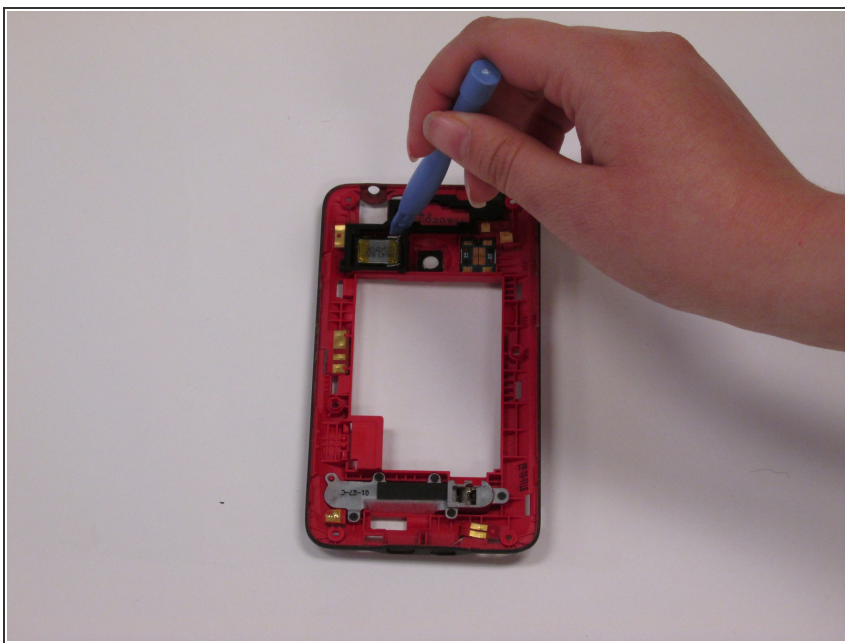

- use plastic pic to gently pry out the speaker
- be sure to have your replacement unit ready

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-09-26 10:30:46 PM.